




EBHZ 68

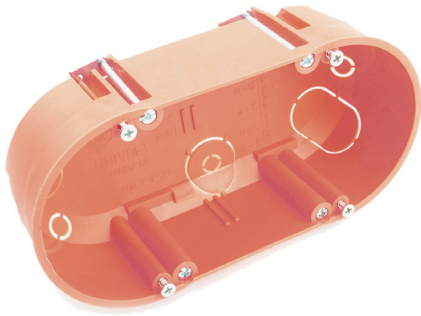

dry lining twin gang box, chlorine-free

Properties	mounting screw spacing 60mm, drilled hole size required 2x Ø 68mm, for partition board thickness from 7 to 35mm, maximum 5 conduit entries Ø 20mm, for mounting 2 devices with a standard distance of 71 mm
Colour	orange, similar to RAL 2004
Usage	for dry lining installations

Standard: ÖVE/ÖNORM EN 60670-22:2007



Halogen free	Degree of protection (IP)
False	IP30

Art. no.	Part No.	Dimensions	VPE (pc) small/medium/large
102 231	EBHZ 68/2 100 pc. box individually labelled	136 x 65 x 45 mm	- / 100 / 2400
103 308	EBHZ 68/2 10 pc. bag	136 x 65 x 45 mm	1 / 10 / 240

Areas of Recommended Application

break-out opening	True
seal membrane	False
nozzle	False
step membrane	False
Mounting switching equipment	Screwing
Luminaire hook mounting	False
Nozzle	None
With nail lugs	False
Circuit integrity	None

Further technical details

Model	Double
Shape	Oval
Mounting method	Hollow wall
With screws	True
Provided with revolving ring	
Connectable	
Equipped with	None
Cover attachment	Screwed
Material	PP-Blend